

Pushlok™ hardened connector technology is the key component enabling smaller terminals and drops for FTTx networks than ever before. Designed for use in nearly every access network environment, the terminal is small enough to be placed in existing handholes or pedestals where space is paramount, on building façades, or in aerial networks (pole- or strand-mount). Improved aesthetics improve end-user adoption for façade applications.

There are two styles of terminals designed to meet various space and density requirements: terminals with one row of adapter ports and terminals with two rows of adapter ports. For terminals with one row of adapter ports, the ports are aligned in a single row with the input stub on the left and 2-, 4-, 6- or 8-distribution ports on the right. For terminals with two rows of ports, the input stub is on the front left of the terminal and there are 6-, 8-, 12- or 16-distribution ports. Each port's corresponding release button is actuated to remove the dust cap or drop. When installing drops, the keyed ports provide an audible and physical positive feedback minimizing technician variation and potential damage due to mishandling.

Features	Benefits
Pushlok cable assembly connector ports for customer drop terminations	Lower installation cost and increase speed of connection
Standard and integrated splitter terminal options	Solution supports various architecture types
Durability	100 lb cable tensile strength
Available stubbed or preterminated with OptiTip® multifiber technology	Compatible with existing FlexNAP™ installations
Small-form-factor optimizes space in pedestals/handholes	Lower profile overall with drop entry ports on bottom
Ultrasonically welded housing	Eliminates water ingress potential and prevents unwanted entry in the field
Factory-terminated polished connectors	Eliminates loss associated with excess fusion splices

Standards

Telcordia	Designed to Telcordia GR-771-CORE, Issue 1
-----------	--------------------------------------------

Mechanical Specifications

Terminal Type	Dimensions (L x W x H)	Weight
2-Distribution Port Terminal (one row of 4 ports, 2 filled)	15.4 x 8.4 x 3.0 cm (6.06 x 3.29 x 1.18 in)	0.195 kg (0.43 lb)
4-Distribution Port Terminal (one row of 4 ports)	15.4 x 8.4 x 3.0 cm (6.06 x 3.29 x 1.18 in)	0.195 kg (0.43 lb)
6-Distribution Port Terminal (one row of 8 ports)	15.4 x 13.4 x 3.0 cm (6.06 x 5.29 x 1.18 in)	0.390 kg (0.86 lb)
6-Distribution Port Terminal (two rows of 4 ports, 2 filled)	15.4 x 8.4 x 5.8 cm (6.06 x 3.29 x 2.30 in)	0.400 kg (0.88 lb)
8-Distribution Port Terminal (one row of 8 ports)	15.4 x 13.4 x 3.0 cm (6.06 x 5.29 x 1.18 in)	0.390 kg (0.86 lb)
8-Distribution Port Terminal (two rows of 4 ports)	15.4 x 8.4 x 5.8 cm (6.06 x 3.29 x 2.30 in)	0.400 kg (0.88 lb)
12-Distribution Port Terminal (two rows of 8 ports, 4 filled)	15.4 x 13.4 x 5.8 cm (6.06 x 5.29 x 2.30 in)	0.600 kg (1.32 lb)
16-Distribution Port Terminal (two rows of 8 ports)	15.4 x 13.4 x 5.8 cm (6.06 x 5.29 x 2.30 in)	0.600 kg (1.32 lb)

Optical Specifications

Connector Type	Fiber Type	Insertion Loss, Maximum	Insertion Loss, Typical	Reflectance, Maximum
Pushlok™ Connector	Single-mode (OS2)	0.50 dB	0.15 dB	-0.65 dB
OptiTap® Multifiber Connector	Single-mode (OS2)	0.50 dB	0.35 dB	-0.65 dB

Packaging

Cable Stub Length	Dimensions (L x W x H)	Packaging Method
Cables ≤ 350 ft	152 x 762 x 762 mm (6 x 30 x 30 in)	Box
Cables ≥ 350 ft	846 x 178 x 846 mm (33 x 7 x 33 in)	Reel

Terminal Cable Stub Information

SST Cable Stub

Application	Corning SST-Drop™ cables offer the ease of installation of standard ALTOS® cable in an easy-access, single-tube design. The toneable version allows for effortless detection of buried cable with a toning conductor that can be separated. The dielectric version eliminates any bonding and grounding requirements
Cable Specification Reference Materials	1-12 F SST Toneable Cable: Family Spec Sheet 0336_NAFTA_AEN 12 F SST Dielectric Cable: Product Specification 012EB4-14701A20_NAFTA_AEN

MiniXtend Cable Stub

Application	Corning MiniXtend® Cable with Binderless* FastAccess® Technology is an all-dielectric loose tube cable designed for microduct applications. The outer diameter of the 12-72 F cable is 5.4 mm (0.21 in).
Cable Specification Reference Materials	Family Spec Sheet 0136_NAFTA_AEN


*Corning's proprietary binderless FastAccess technology refers to the combination of a Corning FastAccess technology jacket with an innovative technology used to bind cable construction through the manufacturing process, eliminating the use of binder yarns and waterblocking tapes.

Evolv™ Splitter Terminals with Pushlok™ Technology



Evolv Splitter Terminal Ordering Information

Splitter Terminals	
Part Number	Product Description
DSH2F100D1NC000SOP	Evolv™ Splitter Terminal with Pushlok™ Technology, 2 port, unstubbed, 1x2 splitter
DSH4F100D1NC000SOP	Evolv Splitter Terminal with Pushlok Technology, 4 port, unstubbed, 1x4 splitter
DSF8F100D1NC000SOP	Evolv Splitter Terminal with Pushlok Technology, 8 port, unstubbed, 1x8 splitter
DSF9F100D1NC000SOP	Evolv Splitter Terminal with Pushlok Technology, 8 port, unstubbed, 1x8 splitter, 2 rows of 4 ports
DSP6F100D1NC000SOP	Evolv Splitter Terminal with Pushlok Technology, 16 port, unstubbed, 1x16 splitter, 2 rows of 8 ports

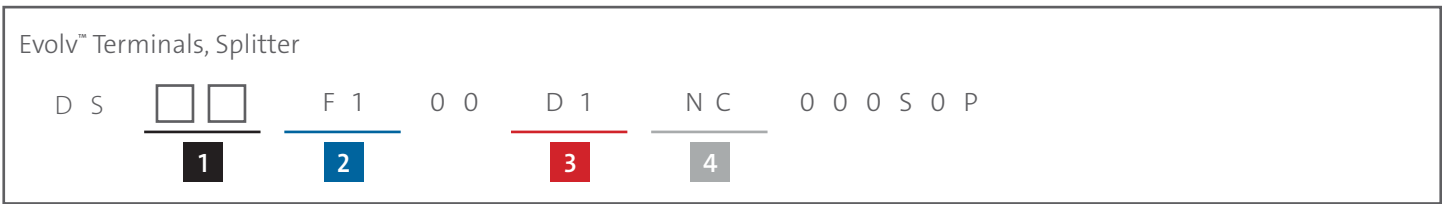

1 Select number of Pushlok™ single-fiber connector ports.

H2 = 2 ports F9 = 8 ports (2 rows of 4 ports)
 H4 = 4 ports P6 = 16 ports (2 rows of 8 ports)
 F8 = 8 ports

2 Defines connector type.

F1 = Single-fiber per port


3 3 Defines port connector type.

D1 = Single-fiber Pushlok SC APC

4 Defines tail connector type.

NC = Not connectorized

Evolv™ Stubbed Terminals with Pushlok™ Technology

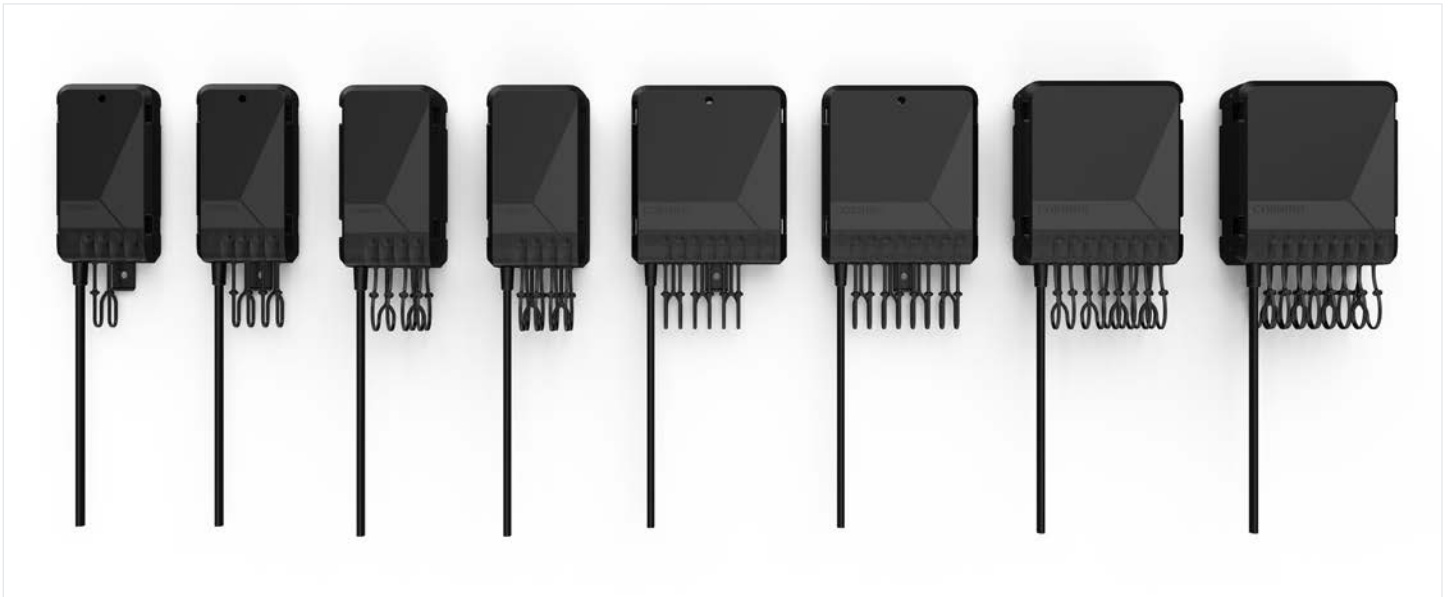

Stubbed Terminals — See Additional Configurations on Page 5

Part Number	Product Description
DMA2F1TDD1NC010F0P	Evolv™ Terminal with Pushlok™ Technology, 2 port, stubbed, SST toneable, 10 ft
DMA4F1FDD1NC050F0P	Evolv Terminal with Pushlok Technology, 4 port, stubbed, SST dielectric, 50 ft
DMA6F1TDD1NC100F0P	Evolv Terminal with Pushlok Technology, 6 port, stubbed, SST toneable, 100 ft
DMB3F1TDD1NC150F0P	Evolv Terminal with Pushlok Technology, 6 port, 2 rows of 4 ports (2 filled), stubbed, SST toneable, 150 ft
DMA8F1FDD1NC500F0P	Evolv Terminal with Pushlok Technology, 8 port, stubbed, SST dielectric, 500 ft
DMB4F1TDD1NC010F0P	Evolv Terminal with Pushlok Technology, 8 port, 2 rows of 4 ports, stubbed, SST toneable, 10 ft
DMB6F1FDD1NC050F0P	Evolv Terminal with Pushlok Technology, 12 port, 2 rows of 8 ports (4 filled), stubbed, SST dielectric, 50 ft
DMB8F1FDD1NC100F0P	Evolv Terminal with Pushlok Technology, 16 port, 2 rows of 8 ports, stubbed, SST dielectric, 100 ft
DMA2F1MLD1NC010F0P	Evolv Terminal with Pushlok Technology, 2 port, stubbed, MiniXtend®, 10 ft
DMA4F1MLD1NC050F0P	Evolv Terminal with Pushlok Technology, 4 port, stubbed, MiniXtend, 50 ft
DMA6F1MLD1NC100F0P	Evolv Terminal with Pushlok Technology, 6 port, stubbed, MiniXtend, 100 ft
DMB3F1MLD1NC200F0P	Evolv Terminal with Pushlok Technology, 6 port, 2 rows of 4 ports (2 filled), stubbed, MiniXtend, 200 ft
DMA8F1MLD1NC500F0P	Evolv Terminal with Pushlok Technology, 8 port, stubbed, MiniXtend, 500 ft
DMB4F1MLD1NC010F0P	Evolv Terminal with Pushlok Technology, 8 port, 2 rows of 4 ports, stubbed, MiniXtend, 10 ft
DMB6F1MLD1NC050F0P	Evolv Terminal with Pushlok Technology, 12 port, 2 rows of 8 ports (4 filled), stubbed, MiniXtend, 50 ft
DMB8F1MLD1NC100F0P	Evolv Terminal with Pushlok Technology, 16 port, 2 rows of 8 ports, stubbed, MiniXtend, 100 ft

Evolv™ Stubbed Terminal Ordering Information

Evolv Terminals, Stubbed



1 Select number of Pushlok™ single-fiber connector ports.

- A2 = 2 ports
 - A4 = 4 ports
 - A6 = 6 ports
 - A8 = 8 ports
 - B3 = 6 ports (2 rows of 4 ports, 2 filled)
 - B4 = 8 ports (2 rows of 4 ports)
 - B6 = 12 ports (2 rows of 8 ports, 4 filled)
 - B8 = 16 ports (2 rows of 8 ports)*
- *only available with MiniXtend stub; SST dielectric stub coming soon*

2 Defines connector type.

- F1 = Single-fiber per port

3 Select cable type.

- FD = SST flat dielectric drop cable
- TD = SST flat toneable drop cable
- ML = MiniXtend® loose tube cable

4 Defines port connector type.

- D1 = Single-fiber Pushlok SC APC

5 Defines tail connector type.

- NC = Not connectorized

6 Select cable stub length.

- 10 ft increments up to 3,400 ft available.
- See Table A for lengths ≥ 1,000 ft.

7 Select unit length.

- F = Feet
- M = Meters

8 Select packaging.

- P = Standard spool — individual packaging
- Z = Reverse spool — individual packaging
- B = Bulk packaging

Table A: Alpha codes for lengths ≥ 1,000 ft

A00 = 1,000	H00 = 1,700	P00 = 2,400	W00 = 3,100
B00 = 1,100	J00 = 1,800	Q00 = 2,500	X00 = 3,200
C00 = 1,200	K00 = 1,900	R00 = 2,600	Y00 = 3,300
D00 = 1,300	L00 = 2,000	S00 = 2,700	Z00 = 3,400
E00 = 1,400	M00 = 2,100	T00 = 2,800	
F00 = 1,500	N00 = 2,200	U00 = 2,900	
G00 = 1,600	O00 = 2,300	V00 = 3,000	

Evolv™ Stubbed Terminals with Pushlok™ Technology for FlexNAP™ Systems



Stubbed Terminals for FlexNAP™ Systems — See Additional Configurations on Page 7

Part Number	Product Description
DFA2F1FDD1M1050F0P	Evolv™ Terminal with Pushlok™ Technology, 2 port, preconnectorized OptiTip® stub, SST dielectric, 50 ft
DFA4F1FDD1M1100F0P	Evolv Terminal with Pushlok Technology, 4 port, preconnectorized OptiTip stub, SST dielectric, 100 ft
DFA6F1FDD1M1100F0P	Evolv Terminal with Pushlok Technology, 6 port, preconnectorized OptiTip stub, SST dielectric, 100 ft
DFB3F1FDD1NC150F0P	Evolv Terminal with Pushlok Technology, 6 port, 2 rows of 4 ports (2 filled), preconnectorized OptiTip stub, SST dielectric, 150 ft
DFA8F1FDD1M1500F0P	Evolv Terminal with Pushlok Technology, 8 port, preconnectorized OptiTip stub, SST dielectric, 500 ft
DFB4F1FDD1M1050F0P	Evolv Terminal with Pushlok Technology, 8 port, 2 rows of 4 ports, preconnectorized OptiTip stub, SST dielectric, 50 ft
DFB6F1FDD1M1100F0P	Evolv Terminal with Pushlok Technology, 12 port, 2 rows of 8 ports (4 filled), preconnectorized OptiTip stub, SST dielectric, 100 ft

Evolv™ Terminal, Stubbed for FlexNAP™ Systems Ordering Information

Evolv™ Terminals, Stubbed for Standard FlexNAP™ Systems



1 Select number of Pushlok™ single-fiber connector ports.

A2 = 2 ports B3 = 6 ports (2 rows of 4 ports, 2 filled)
 A4 = 4 ports B4 = 8 ports (2 rows of 4 ports)
 A6 = 6 ports B6 = 12 ports (2 rows of 8 ports, 4 filled)
 A8 = 8 ports

2 Defines connector type.

F1 = Single-fiber per port

3 Select cable type.

FD = SST flat dielectric drop cable
 TD = SST flat toneable drop cable

4 Defines port connector type.

D1 = Single-fiber Pushlok SC APC

5 Defines tail connector type.

M1 = OptiTap® connector

6 Select cable stub length.

10 ft increments up to 3,400 ft available.
 See Table A for lengths ≥ 1,000 ft.

7 Select unit length.

F = Feet
 M = Meters

8 Select packaging.

P = Standard spool — individual packaging
 Z = Reverse spool — individual packaging
 B = Bulk packaging

A00 = 1,000	H00 = 1,700	P00 = 2,400	W00 = 3,100
B00 = 1,100	J00 = 1,800	Q00 = 2,500	X00 = 3,200
C00 = 1,200	K00 = 1,900	R00 = 2,600	Y00 = 3,300
D00 = 1,300	L00 = 2,000	S00 = 2,700	Z00 = 3,400
E00 = 1,400	M00 = 2,100	T00 = 2,800	
F00 = 1,500	N00 = 2,200	U00 = 2,900	
G00 = 1,600	O00 = 2,300	V00 = 3,000	

Evolv™ Optical Tap Terminals with Pushlok™ Technology



1x2 Optical Tap Terminal, 90/10 Power Split

1x4 Optical Tap Terminal, 90/10 Power Split

1x8 Optical Tap Terminal, 90/10 Power Split

Optical distributed taps, known also as uneven-split or asymmetric terminals, are most appropriate for short length, dense environments or rural FTTx applications where lean distribution runs are desired. Each run supports 32 or 64 subscriber ONTs with cascaded multiport terminals utilizing preconnectorized single-fiber assemblies in the distribution. The fully preconnectorized system reduces installation costs while increasing the speed of deployment.

This solution is comprised of an array of power-split ratios to customize each run for optimal signal reach. Tap splits of 90/10, 85/15, 80/20, 70/30, and 60/40 split ratios can be cascaded, or daisy-chained, to accommodate a wide variety of deployment scenarios.


Each multiport terminal includes the uneven, asymmetric splitter, a standard 1x2, 1x4, or 1x8 splitter to support customer connections, as well as a pass-through port feeding subsequent terminals in the run in a single form factor. The number of terminals in an individual run and the variation of multiport terminals used is dependent upon the distances between terminals and subscribers to maintain an acceptable link loss budget. By limiting the number of terminal options and utilizing preconnectorized Pushlok™ drop cables, FTTx designs and material inventories can be simplified.

Features	Benefits
Pushlok Connector Ports for Drop Termination	Lower installation cost and increased speed of interconnection
Stubless Multiport Terminal System	Reduces distribution cable fiber count; allows full plug-and-play distribution deployment, without requiring splicing
Full Preconnectorized Single-Fiber Architecture	A cost-effective solution that diverts a portion of power to support a typical run of 32 to 64 ONTs
Factory-Installed and Tested Connectors	Connector design provides stability, reliability, and durability
Supports Various Power Split Ratios	Solutions available to accommodate numerous combinations of power split ratio designs
Rapid Repair/Restoration	Damaged single-fiber preconnectorized drops can be repaired quickly with low-skill technicians to restore subscriber services
Dual-Ended ROC™ Drop Cable Assembly	ROC drop assemblies terminated with Pushlok connectors on both ends provide quick and efficient connectivity between terminals

Evolv™ Optical Tap Terminals with Pushlok™ Technology

The optical distributed tap architecture leverages a cascaded network of uneven-split, or asymmetric split, multiport terminals to ensure sufficient signal reaches subscribers along the route. As the first terminal is closest to the signal source (OLT), a lower amount of signal is needed to feed the subscribers served from the 1x2, 1x4, or 1x8 splitter.

In many cases, the first multiport terminal will utilize a 90/10 power split where the 10% feeds the subscriber ports and the 90% passes on to feed subsequent terminals downstream. Subsequent terminals in the chain either maintain a similar uneven-split ratio or a higher ratio of local power depending upon the distances between terminals and the total link budget. In higher density environments with short distances between terminals, operators may serve more than the standard 32 or 64 subscribers. However, in low-density rural runs spanning long distances, operators may serve fewer subscribers per route as this is heavily dependent upon the link budget.

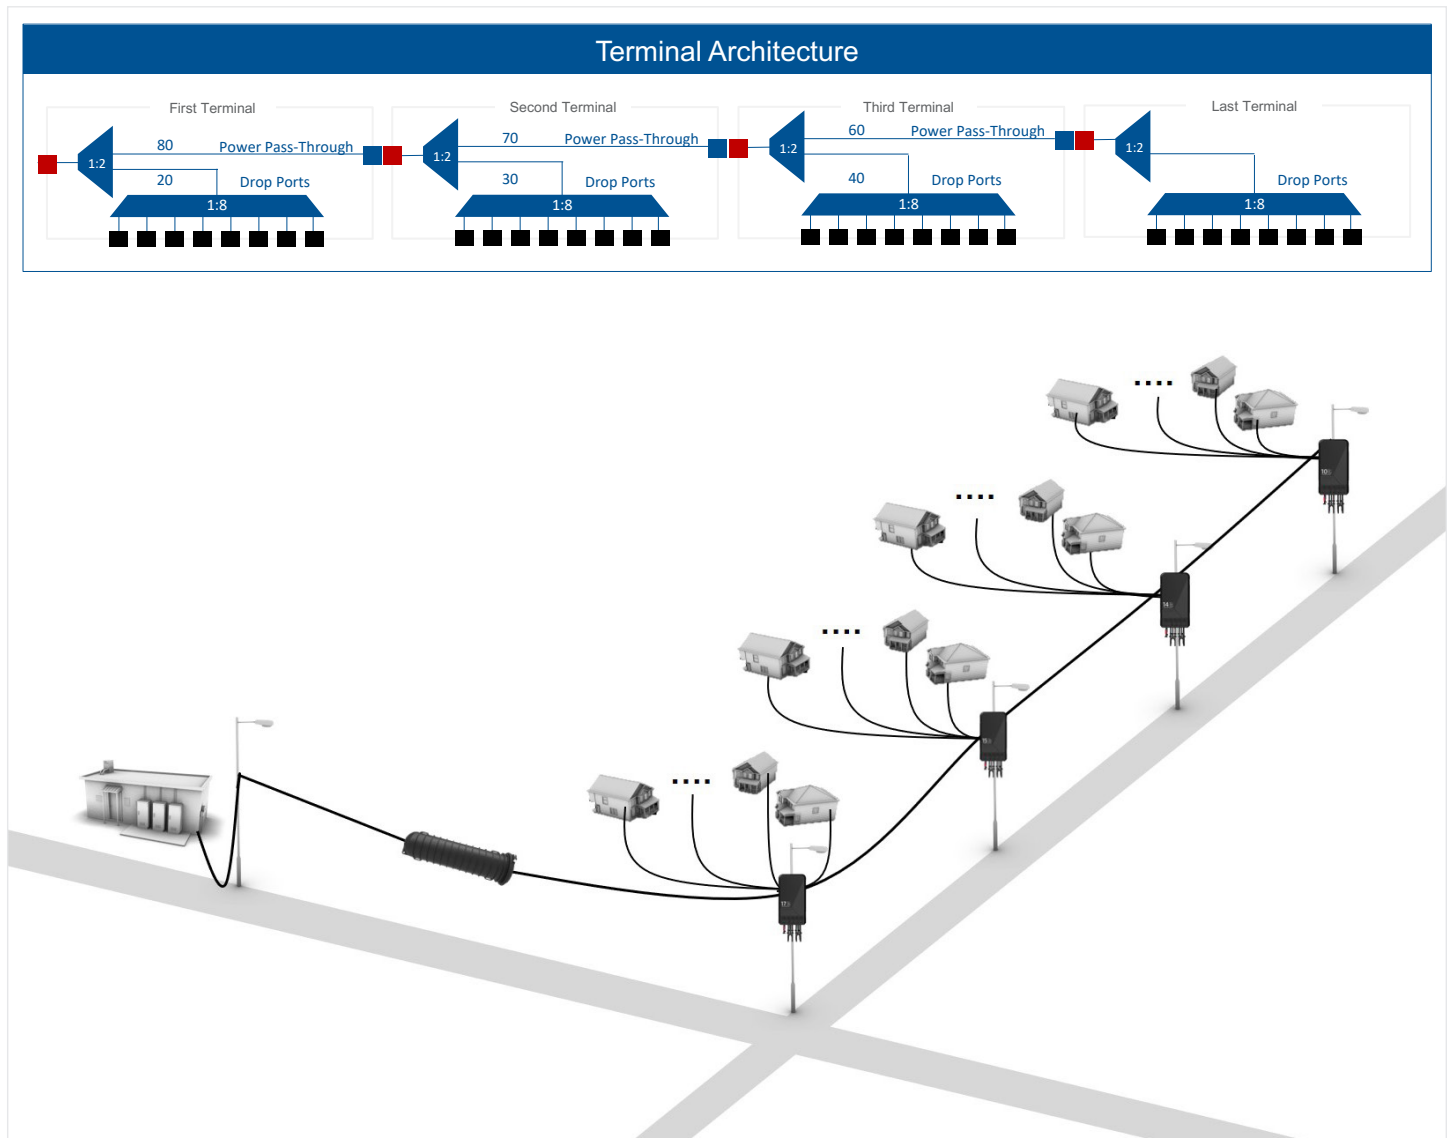

Optical Tap Network Architecture Example Illustration (8-Port Evolv Terminals Shown)

Evolv™ Optical Tap Terminals with Pushlok™ Technology

Mechanical Specifications	
Application	Aerial, duct, direct-buried
Dimensions (L x W x H)	2-Port Evolv™ Terminal: 15.4 x 8.4 x 3.0 cm (6.06 x 3.29 x 1.18 in) 4-Port Evolv Terminal: 15.4 x 13.4 x 3.0 cm (6.06 x 5.29 x 1.18 in) 8-Port Evolv Terminal: 15.4 x 8.4 x 5.8 cm (6.06 x 3.29 x 2.30 in)
Weight	2-Port Evolv Terminal: 0.195 kg (0.43 lb) 4-Port Evolv Terminal: 0.390 kg (0.86 lb) 8-Port Evolv Terminal: 0.400 kg (0.88 lb)
Packaging	Individual packaging
Termination	Pushlok™ connector assemblies
Axial Pull, Plug to Adapter	50 lbs
Axial Pull, Plug to Cable	100 lbs in axial pull with load applied to the dust cap
Cold Mate/Demate	-20°C mechanical testing

2-Port Evolv Terminal Optical Specifications			
Splitter Type	Insertion Loss, Max	Insertion Loss, Typical	Reflectance, Typical
Pass-Through Port (90)	1.20 dB	1.00 dB	-55 dB
Drop Port (10)	15.40 dB	14.50 dB	-55 dB
Pass-Through Port (85)	1.50 dB	1.20 dB	-55 dB
Drop Port (15)	13.20 dB	12.60 dB	-55 dB
Pass-Through Port (80)	1.80 dB	1.40 dB	-55 dB
Drop Port (20)	11.80 dB	11.20 dB	-55 dB
Pass-Through Port (70)	2.40 dB	2.00 dB	-55 dB
Drop Port (30)	10.00 dB	9.40 dB	-55 dB
Pass-Through Port (60)	3.10 dB	2.80 dB	-55 dB
Drop Port (40)	8.70 dB	8.00 dB	-55 dB

4-Port Evolv Terminal Optical Specifications			
Splitter Type	Insertion Loss, Max	Insertion Loss, Typical	Reflectance, Typical
Pass-Through Port (90)	1.20 dB	1.00 dB	-55 dB
Drop Port (10)	19.30 dB	17.20 dB	-55 dB
Pass-Through Port (85)	1.50 dB	1.20 dB	-55 dB
Drop Port (15)	17.00 dB	15.50 dB	-55 dB
Pass-Through Port (80)	1.80 dB	1.40 dB	-55 dB
Drop Port (20)	16.00 dB	14.50 dB	-55 dB
Pass-Through Port (70)	2.40 dB	2.00 dB	-55 dB
Drop Port (30)	13.60 dB	12.20 dB	-55 dB
Pass-Through Port (60)	3.10 dB	2.80 dB	-55 dB
Drop Port (40)	12.30 dB	11.00 dB	-55 dB

Evolv™ Optical Tap Terminals with Pushlok™ Technology

8-Port Multiport Optical Specifications

Splitter Type	Insertion Loss, Max	Insertion Loss, Typical	Reflectance, Typical
Pass-Through Port (90)	1.20 dB	1.00 dB	-55 dB
Drop Port (10)	21.74 dB	20.420 dB	-55 dB
Pass-Through Port	1.50 dB	1.20 dB	-55 dB
Drop Port (15)	20.98 dB	18.60 dB	-55 dB
Pass-Through Port (80)	1.80 dB	1.40 dB	-55 dB
Drop Port (20)	18.45 dB	17.50 dB	-55 dB
Pass-Through Port (70)	2.40 dB	2.00 dB	-55 dB
Drop Port (30)	16.71 dB	15.40 dB	-55 dB
Pass-Through Port (60)	3.10 dB	2.80 dB	-55 dB
Drop Port (40)	15.52 dB	14.20 dB	-55 dB

Environmental Characteristics

Characteristics Temperature Rating	-40°C to 85°C (-40°F to 185°F)
RoHS	Free of hazardous substances according to RoHS 2011/65/EU

Standards

Telcordia	Designed to Telcordia GR-771-CORE, Issue 1
-----------	--------------------------------------------

Product Design

Red Connector Port	Input Connector Port
Blue Connector Port	Cascade/Next Hop Connector Port



Optical Tap Evolv Terminal Family (8-Port Evolv Terminals Shown)

Evolv™ Optical Tap Terminal Ordering Information



1 Defines number of terminal ports.

- A4X2 = 4-port terminal, 2 subscribers
- A8X4 = 8-port terminal, 4 subscribers
- B4X8 = 8-port terminal, 8 subscribers

2 Defines connector type.

2 Subscriber Port Terminals

- 15 = 90/10 Power Split
- 13 = 85/15 Power Split
- 11 = 80/20 Power Split
- 09 = 70/30 Power Split
- 08 = 60/40 Power Split
- 04 = 00/00 Power Split

4 Subscriber Port Terminals

- 17 = 90/10 Power Split
- 16 = 85/15 Power Split
- 15 = 80/20 Power Split
- 12 = 70/30 Power Split
- 11 = 60/40 Power Split
- 06 = 00/00 Power Split

8 Subscriber Port Terminals

- 20 = 90/10 Power Split
- 18 = 85/15 Power Split
- 17 = 80/20 Power Split
- 15 = 70/30 Power Split
- 08 = 60/40 Power Split
- 04 = 00/00 Power Split

3 Select packaging.

- P = Standard spool — individual packaging
- B = Bulk packaging

Part Number Examples


Part Number	Product Description	Units per Delivery
DTA4X21500NC000SOP	Optical Tap Evolv Terminal, 90/10 power distribution, 2 port, stubless	1
DTA8X41700NC000SOP	Optical Tap Evolv Terminal, 90/10 power distribution, 4 port, stubless	1
DTB4X82000NC000SOP	Optical Tap Evolv Terminal, 90/10 power distribution, 8 port, stubless	1

Evolv™ Terminal Accessories



Evolv™ Terminal Brackets

Part Number	Product Description
EHC-BKT-Wall	Evolv Wall- and Pole-Mount Terminal Bracket, compatible with 8-, 12-, and 16-port terminals (2 rows of ports)
EHC-BKT-HH	Evolv Handhole-Mount Terminal Bracket, compatible with all Evolv terminals (2, 4, 6, 8, 12 and 16 port)
EHC-BKT-Strand	Evolv Strand-Mount Terminal Bracket, compatible with all Evolv terminals (2, 4, 6, 8, 12 and 16 port)

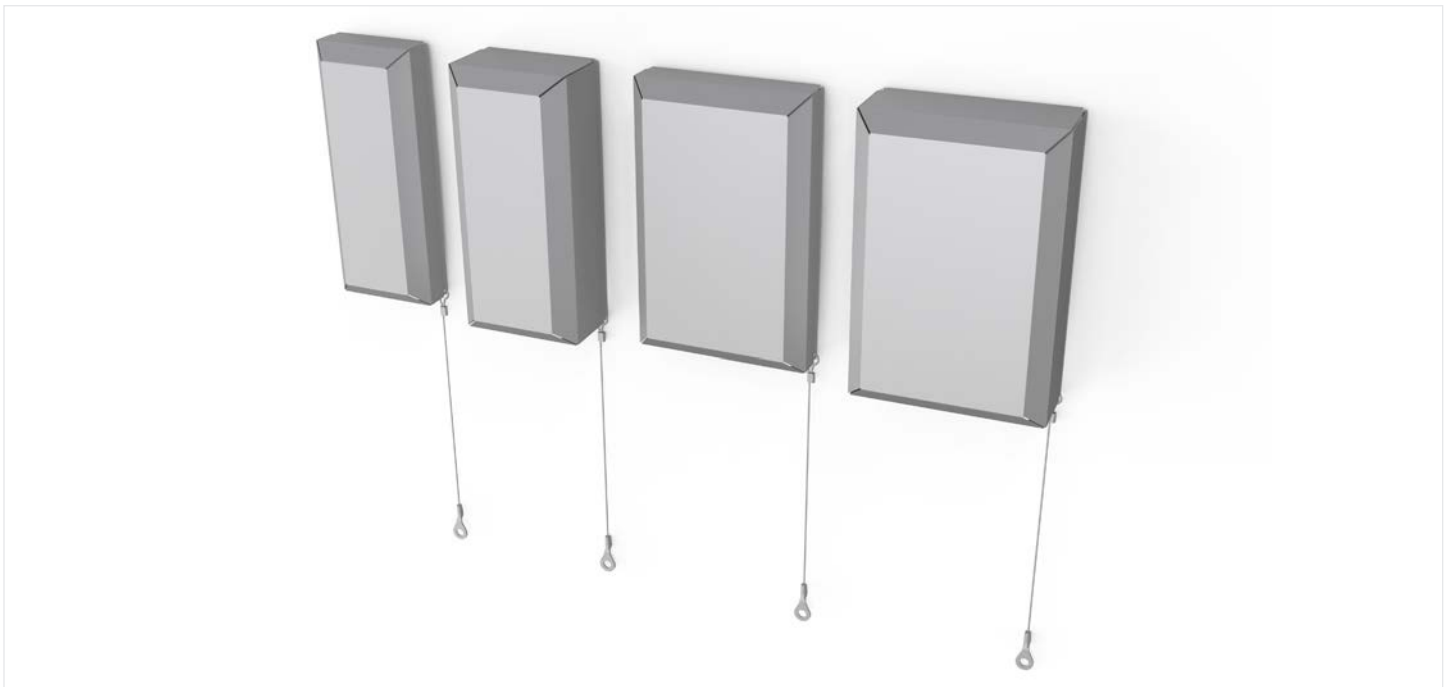

Evolv Terminal Covers

Part Number	Product Description
EHC-CVR-A4-GRAY	Evolv 2- and 4-Port Terminal Cover
EHC-CVR-A8-GRAY	Evolv 6- and 8-Port Terminal Cover
EHC-CVR-B4-GRAY	Evolv 6- and 8-Port Terminal, 2 rows of 4 ports, Cover
EHC-CVR-B8-GRAY	Evolv 12- and 16-Port Terminal, 2 rows of 8 ports, Cover

Evolv™ Port Cleaner with Pushlok™ Technology



Accessory Information

Evolv Port Cleaner with Pushlok Technology

Part Number	CLEANER-PUSHLOK
Description	The Evolv port cleaner with Pushlok technology is compatible with both Pushlok and OptiTap® connectors and Evolv terminals and multiports. Single-fiber port cleaner accessories are proven effective for removing the following from connector end faces: skin oil, hand lotion, Arizona road dust, pre- and postmate graphite, salt, isopropyl alcohol residue, and distilled water residue. These cleaners are easy to use and offer over 525 cleanings.
Standards	Free of hazardous substances according to RoHs 2011/65/EU

CORNING

Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC 28216 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

Corning Optical Communications reserves the right to improve, enhance, and modify the features and specifications of Corning Optical Communications products without prior notification. A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2020, 2021 Corning Optical Communications. All rights reserved. CRR-1417-AEN / July 2021