# CORNING

## **RGB PM Specialty Optical Fiber**

Polarization Maintaining (PM) Fiber

Polarized fiber optimized for RGB wavelength band

The newly designed Panda RGB PM Specialty Optical Fiber is a polarization maintaining fiber optimized for operation over the entire visible spectrum. This increased wavelength range enables greater flexibility by allowing for the use of a single fiber in applications across this region.


### **Applications:**

- Medical
- Spectroscopy
- Display



- Designed for use at wavelengths between 405 nm and 630 nm
- Extremely high birefringence
- Excellent polarization maintaining properties



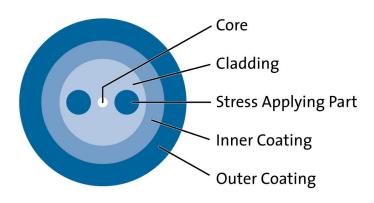

#### **RGB PM**

#### **Key Optical Specifications**

| Operating Wavelength (nm)                                   | 405-640            |
|-------------------------------------------------------------|--------------------|
| Cutoff Wavelength (nm)                                      | ≤ 400              |
| Maximum Attenuation (dB/km)                                 | ≤ 50 @ 405 nm      |
| Mode-field Diameter (µm)                                    | 2.3 ± 0.6 @ 410 nm |
|                                                             | 3.8 ± 1.0 @ 630 nm |
| Beat Length (mm)                                            | < 2.0 @ 630 nm     |
| Polarization Crosstalk @ 60mm bend diameter dB (dB/10 turn) | -30 @ 630 nm       |

#### **Key Geometric, Mechanical and Environmental Specifications**

| Cladding Outside Diameter (µm)          | 125 ± 1.0           |
|-----------------------------------------|---------------------|
| Coating Outside Diameter (µm)           | 245 ± 15            |
| Core-to-Cladding Offset (µm)            | 1.0                 |
| Proof Test (kpsi)                       | 200                 |
| Operating Temperature* (°C)             | -40 to 85           |
| Coating                                 | UV Curable Acrylate |
| Recommended Minimum Bending Radius (mm) | 30**                |

<sup>\*</sup> without coiling on a shipping reel

PANDA PM Specialty Optical Fiber design uses two stress applying parts to create an extremely high birefringence, resulting in fiber with excellent polarization maintaining properties. This design was invented and patented by Corning Incorporated. Corning continues to have a manufacturing partnership with Fujikura Ltd.

For more information about Corning's leadership in Specialty Fiber technology visit our website at www.corning.com/specialtyfiber

To obtain additional technical information, an engineering sample or to place an order for this product, please contact us at:

Corning Incorporated t + 1-607-974-9974

f +1-607-974-4122

specialtyfiber@corning.com

© 2012 Corning Incorporated



M0500040 Issued: December 2012 Supersedes: July 2012

<sup>\*\*</sup> set due to crosstalk performance