


Low-Profile Wall Plate and Shuttered SC Patch Cords

Low-profile wall plate and shuttered SC patch cords system is designed for intuitive installation from fiber wall plate to optical network terminal (ONT) in FTTH deployment use. The low profile and aesthetic nature of the low-profile wall plate makes it an ideal, clean look for virtually any wall surface placement inside of an apartment or a single-family home.

Shuttered SC patch cords are carefully designed to provide an intuitive visual (red) indicator for proper connection to the low-profile wall plate with shuttered adapter. As the patch cord is plugged into the wall plate, the red color indicator disappears from view indicating a full connection when the red is no longer visible while plugged in. In addition, the shuttered SC patch cords and SC APC connector design helps provide protection from incidental contact and contamination of ferrule end face with a shuttered interface. Both the low-profile wall plate and the shuttered SC patch cords are compatible with standard SC APC adapters and patch cords.

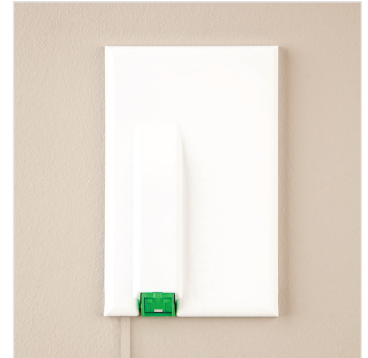

Low-Profile Wall Plate With Shuttered SC Patch Cord

Low-Profile Wall Plate With Shuttered Adapter

Features	Benefits
Low profile for indoor use	Clean look that is less visible and aesthetically pleasing inside living unit
Wall surface mountable or attachable to standard electrical style gang box	Can be positioned virtually anywhere, with no tools, on a flat wall or over existing in-wall electrical-style gang box
Accepts shuttered or standard SC APC coupling	Flexible and backward compatible to defined shuttered system or standard SC APC couplings


Low-Profile Wall Plate Specifications	
Dimensions	4.875 x 3.125-in (124 x 79.4 mm)
Flammability	UL listed (UL 5C)
Standards	Meets mechanical and environmental requirements of GR-3126 sections 4 and 5 – indoor use
Fiber Management	Storage of G.657 B3 900 μm fiber up to 6 ft (2 to 3-ft slack storage recommended)
Adapter Types	Provided with SC shuttered adapter Compatible with standard SC adapter (meeting TIA 604 - FOCIS)
Mounting	Wall surface mount Standard electrical single-gang outlet box



Connecting 900 μm Fiber Pathway Inside Low-Profile Wall Plate



Placing Cover Over Low-Profile Wall Plate

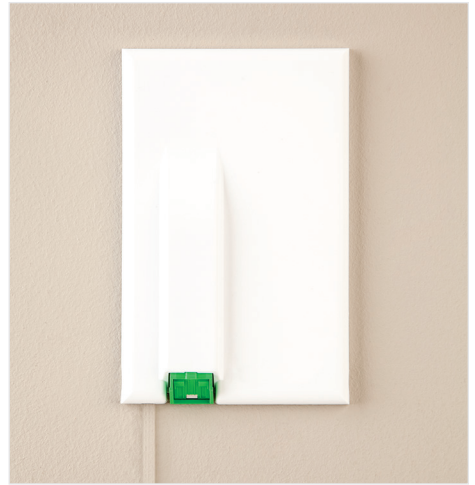


Finished Installation of Low-Profile Wall Plate


Shuttered SC Patch Cords

Features	Benefits
Single motion automatic shutter system	Helps provide protection from incidental contact and contamination of ferrule end face
Bend-resistant optical patch cord	Allows for smaller radius slack storage to reduce visual impact
Visual insertion indicator	Red connector housing mark disappears when fully engaged into adapter

Shuttered SC Patch Cord Specifications	
Application	Indoor use
Optical Performance (Tested at 1310, 1490, 1550, 1625 nm Wavelengths)	Insertion loss (room temp): < 0.3 dB Reflectance max (room temp): < -65 dB
Fiber Type	Single-mode (ultra-bend insensitive ITU-TG.657.B3)
Fiber Count	One fiber with 3 mm jacketed cable
Installed Cable Bend Radius	30 mm without tension 60 mm with max tension of 24.7 lbf
Jacket Color	Bright white
Operating Temperature Range	14° to 140°F (-10° to +60°C)
SC Connector Intermateability Standard	Meets FOCIS-3 SC connector intermateability per TIA-604-3-B
Flammability	Connector: UL 94V-0 Cable: UL OFNR-FT4-ST1

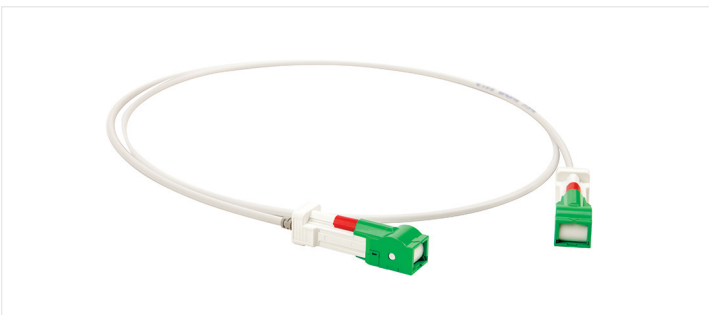

Shuttered SC Patch Cord

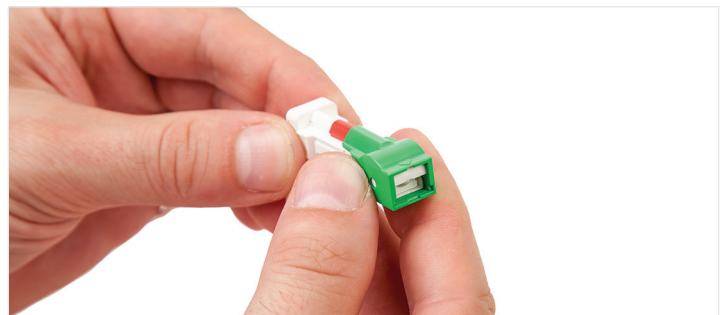

Shuttered SC Patch Cord End

Low-Profile Wall Plate and Shuttered SC Patch Cords Ordering Information

Description	Part Number	Minimum Order
Low-Profile Wall Plate with SC APC shuttered adapter (CLR-WPT-01-SCASH-WH)	80-6114-8874-5	60/Box
1.0 m SC APC to SC APC Shuttered Patch Cords with 3.0 mm jacketed tight-buffered fiber (CLR-PCD-SCASH-1M)	80-6114-8868-7	60/Box
2.0 m SC APC to SC APC Shuttered Patch Cords with 3.0 mm jacketed tight-buffered fiber (CLR-PCD-SCASH-2M)	80-6114-8869-5	60/Box
3.0 m SC APC to SC APC Shuttered Patch Cords with 3.0 mm jacketed tight-buffered fiber (CLR-PCD-SCASH-3M)	80-6114-8870-3	60/Box
4.5 m SC APC to SC APC Shuttered Patch Cords with 3.0 mm jacketed tight-buffered fiber (CLR-PCD-SCASH-4.5M)	80-6114-8894-3	60/Box



CORNING

Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

Corning Optical Communications reserves the right to improve, enhance, and modify the features and specifications of Corning Optical Communications products without prior notification. A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2019 Corning Optical Communications. All rights reserved. CRR-927-AEN / February 2019