

Cable Assemblies

CORNING

Features and Benefits

Flame-retardant jacket

Rugged and durable

Superior Performance Testing

Every termination is tested to ensure the highest in network performance

State-Of-The-Art Manufacturing Processes


Corning proprietary manufacturing processes and advanced technology result in unsurpassed product consistency

Corning advantage


Integrated developer and manufacturer of cable, connectors and fiber to ensure overall cable assembly performance

Corning offers the most complete line of connectors and factory-terminated cables, from single-fiber patch cords to high-fiber-count assemblies. As the industry's leading supplier of cable assemblies, Corning's state-of-the-art manufacturing process ensures unsurpassed connector performance with products that meet or exceed all industry standards for reflectance and insertion loss. Highly trained and qualified associates thoroughly inspect the incoming fibers and ferrules, assemble and polish them using a carefully monitored and controlled process. The assemblies undergo rigorous performance testing to ensure optimal quality in every connector.

Corning's preterminated assemblies use only high-quality Corning optical fibers to ensure total performance quality.

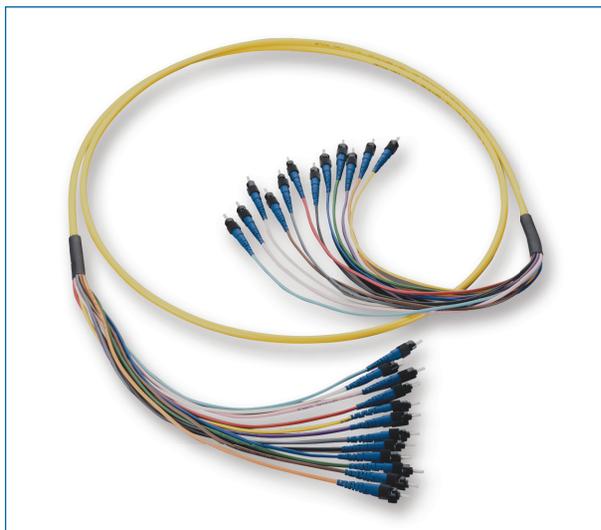

ST Compatible Ultra PC 12-Fiber Cable Assembly
| Photo LAN2784

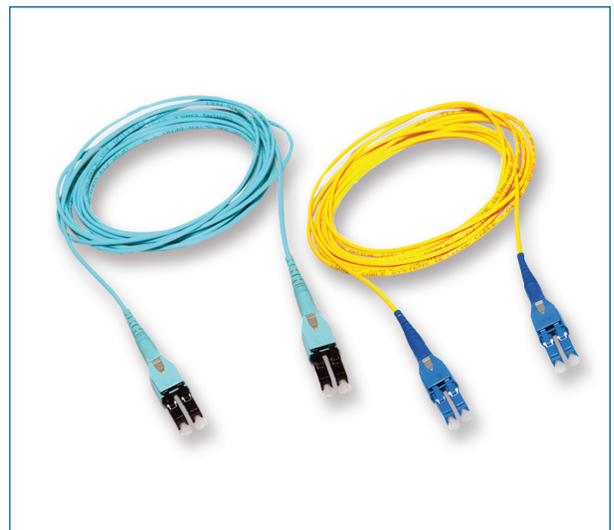

EDGE Reverse Polarity Uniboots
| Photo LAN2217-2218


CORNING

Reverse Polarity Uniboot Duplex Jumpers

EDGE™ Reverse Polarity Uniboot Duplex Jumpers allow for the quick and easy conversion from a TIA-568 A-B polarity to a TIA-568 A-A polarity without exposing the fibers or needing any tools. This jumper comes with a straight-through polarity from the factory, but you can convert it to a flipped jumper with no tools. This uniboot design allows one cable to carry both fibers, reducing jumper bulk when routing.

Features

- Slim round 2-fiber interconnect cable
- Uniboot style duplex connectors
- Improved handling in high-density applications
- Low-loss connectivity enables system design flexibility
- Enabled by bend-insensitive Corning® ClearCurve® multimode or SMF-28e® Ultra single-mode fibers
- Designed to withstand tight bends and challenging cable routes

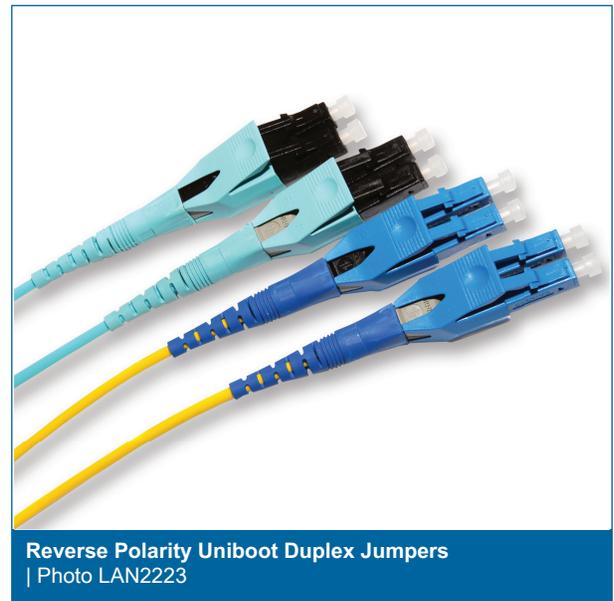

| LC Uniboot Patch Cord Specifications | | | |
|--------------------------------------|----------------|-----------------------|------------------|
| Connector | Connector Code | Max. Attenuation (dB) | Return Loss (dB) |
| MM LC Uniboot | 79 | 0.5 | ≤26 |
| SM LC Uniboot | 78 | 0.5 | ≤55 |

Cable Assemblies

CORNING

Ordering Information

| | | | | | | | | | | | | | | |
|----------------------|----------------------|----------------------|----------------------|---|---|----------------------|---|----------------------|---|---|----------------------|----------------------|----------------------|----------------------|
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | 0 | 2 | <input type="text"/> | D | <input type="text"/> | 2 | 0 | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |
| 1 | 2 | 3 | 4 | | | | | | | | 5 | | 6 | |

1 Select connector one type.
79 = Multimode LC Uniboot (OM3/OM4)
78 = Single-mode LC UPC Uniboot (OS2)

2 Select connector two type.
79 = Multimode LC Uniboot (OM3/OM4)
78 = Single-mode LC UPC Uniboot (OS2)

3 Select fiber type.
T = 50 μ m multimode (OM3)
Q = 50 μ m multimode (OM4)
V = 50 μ m wideband multimode (OM5)
G = Single-mode Ultra (OS2)

4 Select flame rating.
1 = Riser
8 = Plenum

5 Select length.
001-250 (tip-to-tip)

6 Select unit of measure.
F = Feet
M = Meters

Connector specifications |

| Multimode Connectors | | | | | | |
|----------------------|------|-----------------------------|------------------------|--------------------------|---------|-----------|
| Type | Code | Typical Insertion Loss (dB) | | Max. Insertion Loss (dB) | Ferrule | Housing |
| | | 50/125 μm | 62.5/125 μm | | | |
| LC PC Simplex | 03 | 0.35 | | 0.5 | Ceramic | Composite |
| LC PC Duplex | 05 | 0.35 | | 0.5 | Ceramic | Composite |
| SC PC Simplex | 39 | 0.35 | | 0.5 | Ceramic | Composite |
| SC PC Duplex | 57 | 0.35 | | 0.5 | Ceramic | Composite |
| ST Compatible PC | 50 | 0.35 | | 0.5 | Ceramic | Composite |

| Single-mode Connectors | | | | | | |
|------------------------|------|-----------------------------|--------------------------|--------------------------|---------|-----------|
| Type | Code | Typical Insertion Loss (dB) | Max. Insertion Loss (dB) | Typical Reflectance (dB) | Ferrule | Housing |
| | | | | | | |
| LC Duplex UPC | 04 | 0.15 | 0.25 | ≤ -59 | Ceramic | Composite |
| LC Duplex APC | 18 | 0.15 | 0.25 | ≤ -65 | Ceramic | Composite |
| LC Simplex APC | 22 | 0.15 | 0.25 | ≤ -65 | Ceramic | Composite |
| SC Simplex UPC | 58 | 0.15 | 0.25 | ≤ -58 | Ceramic | Composite |
| SC Duplex UPC | 72 | 0.15 | 0.25 | ≤ -59 | Ceramic | Composite |
| SC Simplex APC | 44 | 0.15 | 0.25 | ≤ -65 | Ceramic | Composite |
| SC Duplex APC | 66 | 0.15 | 0.25 | ≤ -65 | Ceramic | Composite |
| ST Compatible UPC | 61 | 0.15 | 0.40 | ≤ -58 | Ceramic | Composite |

Cable Assemblies



Cable Table

| Table A | | | | 62.5 μ m (OM1) | 50 μ m (OM3) | 50 μ m (OM4) | SMF-28e | SMF ClearCurve |
|---|-------------|--------------|-----------------|-----------------------|---------------------|---------------------|---------|-------------------|
| Cable Listing: No Listing Required | | | | | | | | |
| 900 μ m | | | | K4130 | T4180 | Q4190 | R4131 | |
| Indoor Cable | Fiber Count | Flame Rating | Leg Length/OD | Orange | Aqua | Aqua | Yellow | Yellow |
| Single-Fiber Cable (SFC) | 1 | Riser | 1.6 mm | K3116 | T3116 | Q3116 | R3116 | G3116 |
| Zipcord Cable | 2 | Riser | 10 - 13" 2.0 mm | K5120 | T5120 | Q5120 | R5120 | G5120 |
| MIC Cable | 4, 6, 8, 12 | Riser | 39" 2.0 mm | K8120 | T8120 | Q8120 | R8120 | G8120 |
| MIC Cable | 24, 72, 144 | Riser | 39" 2.0 mm | K8120 | T8120 | Q8120 | R8120 | G8120 |
| Zipcord Cable | 2 | Plenum | 10 - 13" 2.0 mm | K5820 | T5820 | Q5820 | R5820 | G5820 |
| MIC Cable | 12 | Plenum | 39" 2.0 mm | K8820 | T8820 | Q8820 | R8820 | G8820 |
| MicroModule Cable (6-144 fiber) | 6 - 144 | Plenum | 39" 2.0 mm | | TD920 | QD920 | | GD920 |
| MicroModule w/grip on one end | | | | | TD9G2 | QD9G2 | | GD9G2 |
| MicroModule w/grip on both ends | | | | | TD9G4 | QD9G4 | | GD9G4 |
| Fiber Type | | | | 62.5 μ m (OM1) | 50 μ m (OM3) | 50 μ m (OM4) | SMF-28e | SMF ClearCurve |
| Indoor/Outdoor Cable | Fiber Count | Flame Rating | Leg Length/OD | Black | Black | Black | Black | Black |
| FREEDM LT (12 & 24 Fiber) | 12 & 24 | Riser | | | | | RUF25* | |
| FREEDM One (6 & 12 Fiber) | 6 & 12 | Riser | | | | | R8F20 | |



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks.

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2017 Corning Optical Communications. All rights reserved.

