

MiniXtend® Cable with Binderless* FastAccess® Technology

CORNING

Corning MiniXtend® Cable with Binderless* FastAccess® Technology is an all-dielectric loose tube cable designed for microduct applications and features industry-leading fiber density.

The innovative Binderless FastAccess Technology improves cable handling and reduces access time up to 70 percent while lowering risk of cable and fiber damage.

The MiniXtend Cable design reduces the cable diameter by up to 50 percent (versus traditional loose tube cables) which improves fiber density for duct applications and also enables new applications which can reduce total install cost by up to 60 percent.

This cable also features Corning SMF-28® Ultra single-mode fiber which combines industry-leading attenuation and improved macrobend performance in one fiber. SMF-28 Ultra fiber is ITU-T Recommendation G.652.D compliant and also exceeds the requirements of the ITU-T Recommendation G.657.A1 standard.

* Corning's patented Binderless* FastAccess® Technology refers to the combination of a Corning FastAccess Technology jacket with an innovative technology used to bind cable construction through the manufacturing process, eliminating the use of binder yarns and waterblocking tapes.

Features and Benefits

Binderless* FastAccess™ Technology

Innovative cable design that reduces cable access time up to 70 percent and lowers the risk of inadvertent fibre damage

Improved cable and fiber density

Small cable OD enables higher density and lower deployment cost; up to 96 fibres in 8 mm ID duct and up to 144 fibers in 10 mm ID duct

Optimised for air-assisted install in microducts

Capable of installation distances greater than 2000 m (6560 ft) at speeds up to 150 m/min (490 ft/min)

Mid-span express buffer tube performance


Meets the Telcordia GR-20 and RDUP/RUS PE-90 requirements for mid-span express buffer tube storage

SMF-28® Ultra fibre

ITU-T G.652.D/G.657.A1 rated fibre with improved attenuation and bend performance as well as compatibility with standard single-mode fibres

Fully waterblocked loose tube, gel-filled design

Meets industry standard waterblocking requirements for outdoor cable

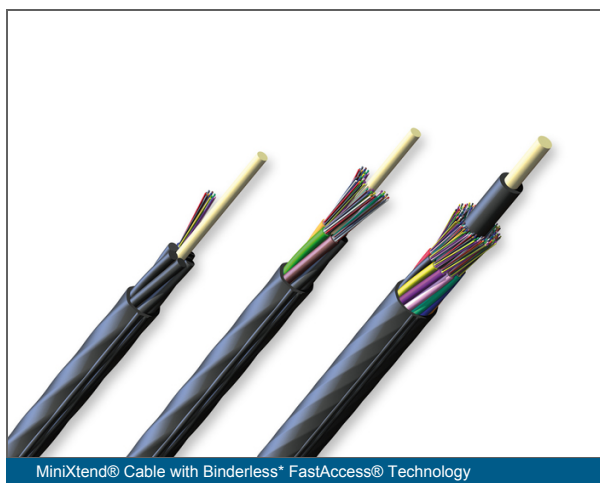

MiniXtend® Cable with Binderless* FastAccess® Technology



Standards	
RoHS	Free of hazardous substances according to RoHS 2011/65/EU



Corning Optical Communications GmbH & Co. KG • Leipziger Strasse 121 • 10117 Berlin, Germany
+00 800 2675 4641 • FAX: • www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2025 Corning Optical Communications. All rights reserved.