

SST-Drop™ Single-Tube, Toneable, Gel-Filled Cable

CORNING

Corning SST-Drop™ toneable cables offer the ease of installation of standard ALTOS cable in an easy-access, single-tube design. The toneable version allows for effortless detection of buried cable with a toning conductor that can be separated. The cables are RDUP (RUS) Listed and offer exceptional crush resistance while the copper portion allows for clear detection in underground installation.

Features and Benefits

Standard ALTOS® Cable tube design in single-tube design

Standard practices and hardware compatibility

Crush resistance


Fiber protection and signal integrity

RDUP (RUS) Listed

Material acceptability

Toneable version

Underground detection

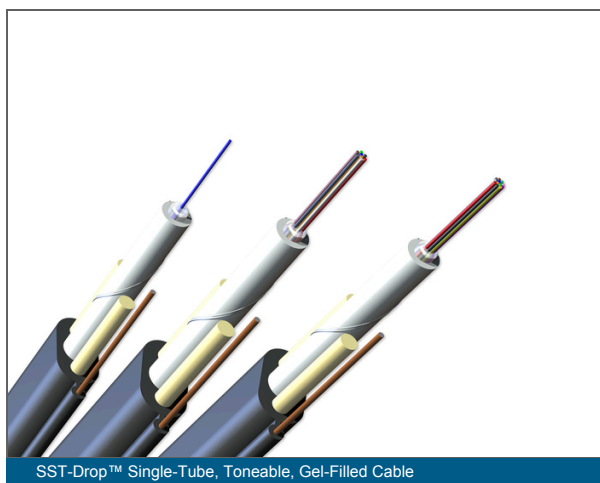

SST-Drop™ Single-Tube, Toneable, Gel-Filled Cable

CORNING

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Specifications

General Specifications

Environment	Outdoor
Product Type	Self-Supporting, Figure-8
Cable Type	Single Tube

Temperature Range

Temperature Range, Storage	-40 °C - 70 °C (-40 °F - 158 °F)
Temperature Range, Installation	-30 °C - 70 °C (-22 °F - 158 °F)
Temperature Range, Operation	-40 °C - 70 °C (-40 °F - 158 °F)

Design Characteristics Cable

Fiber Count	Buffer Tube Diameter
1 - 10	3 mm (0.12 in)

Mechanical Characteristics Cable

Fiber Count	Nominal Outer Diameter	Min. Bend Radius Operation	Max. Tensile Strength, Short-Term	Max. Tensile Strength, Long-Term	Cable Weight
1 - 10	10.2 mmx 4.7 mm (0.4 inx 0.19 in)	80 mm (3.15 in)	1350 N (303.49 lbf)	400 N (89.92 lbf)	37 kg/km (24.86 lb/1000 ft)

SST-Drop™ Single-Tube, Toneable, Gel-Filled Cable

CORNING

Transmission Performance

Single-mode		
Fiber Name	Single-mode (OS2)	Single-mode (OS2)
Performance Option Code	00	01
Fiber Category	OS2	OS2
Wavelengths	1310 nm / 1383 nm / 1550 nm	1310 nm / 1383 nm / 1550 nm
Fiber Code	E	E
Maximum Attenuation	0.35 dB/km / 0.35 dB/km / 0.25 dB/km	0.4 dB/km / 0.4 dB/km / 0.3 dB/km



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2025 Corning Optical Communications. All rights reserved.