

Eclipse™ Endcaps

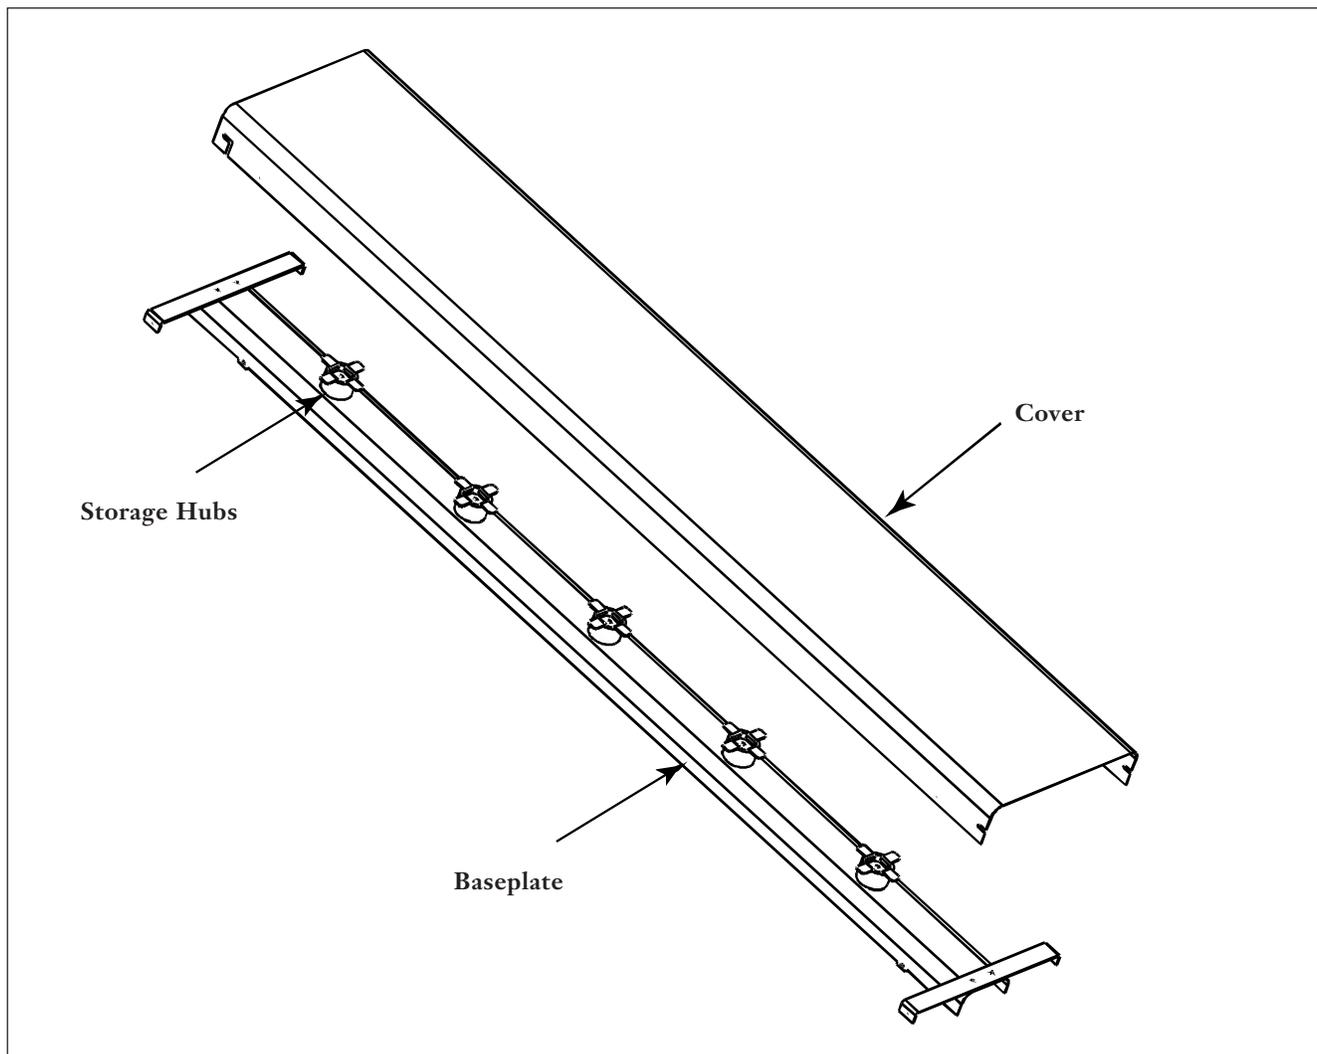


Figure 1

1. General

1.1 This instruction describes the installation of the Eclipse Endcap.

1.2 This document is being reissued to include updated corporate information.

2. Description

The endcap mounts at the end of a line of frames or a single frame to provide a clean, finished look. The endcap also includes storage hubs for storing fiber. The ECL-EC-7 is intended for use with the ECL-IBD-7-1 only.

3. Components

Figure 1 shows the major components of an Endcap. Also included with the Endcap is a kit containing twelve 12-24 screws.

4. Tools and Equipment

A standard complement of tools will be required.

5. Installation

Loosen the screws at the top and bottom of the endcap that are holding the cover to the base. Slide off the cover (Figure 2).

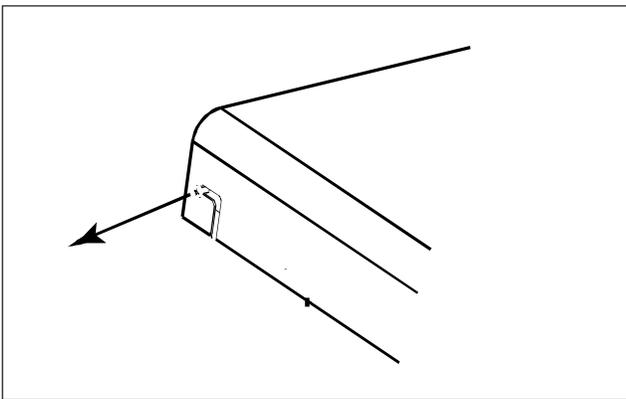


Figure 2

6. Attaching the Endcap to an Interbay Dual Storage Unit

6.1 Attach the curved baseplate to the Interbay Dual Storage (IBDS) unit upright. The curved baseplate fits inside the IBDS unit upright (Figure 3). Use four (4) 12-24 screws to fasten the parts together in the locations (front and back) shown in Figure 4.

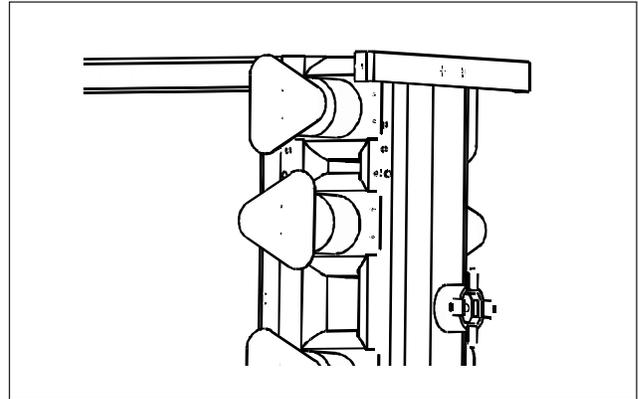


Figure 3

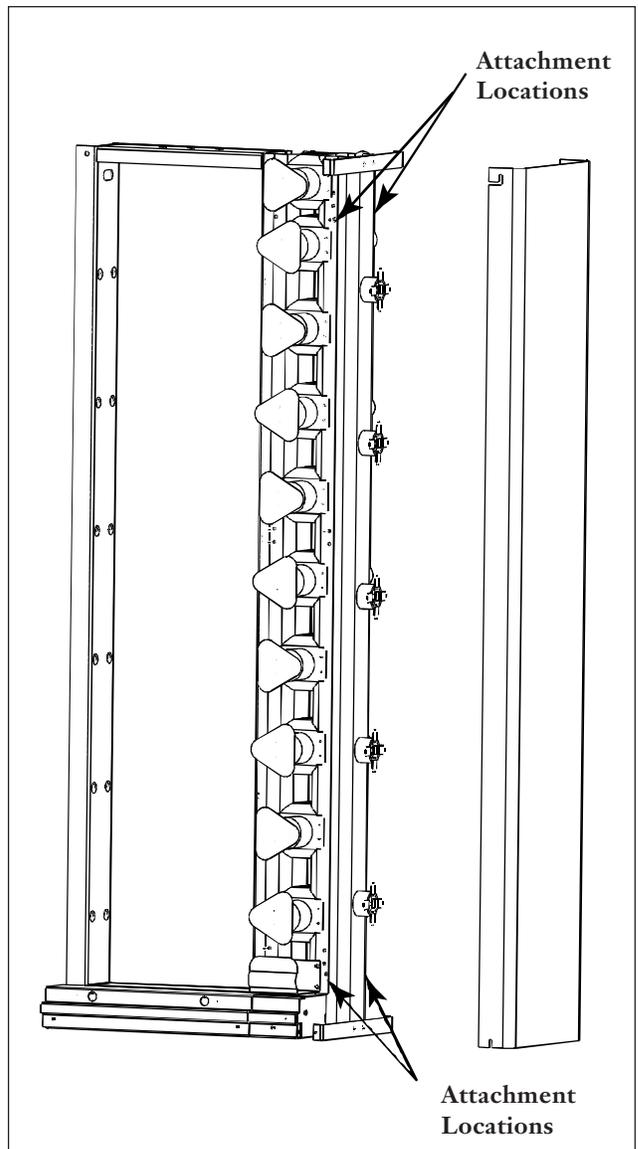


Figure 4

6.2 Reattach endcap cover to base and tighten mounting screws (Figure 5).

7. Specifications

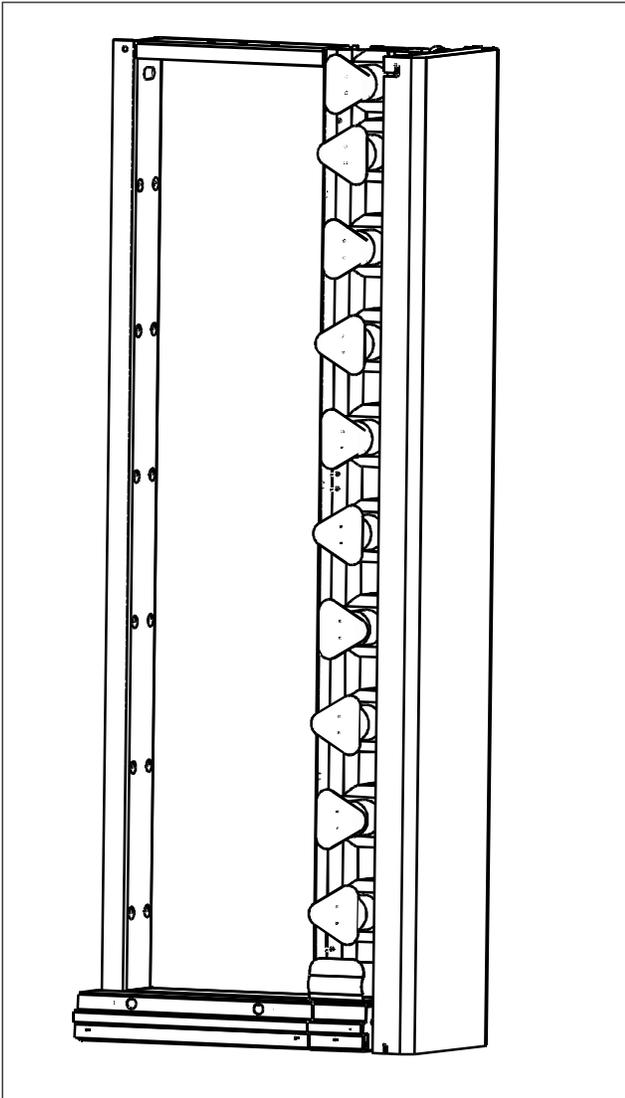


Figure 5

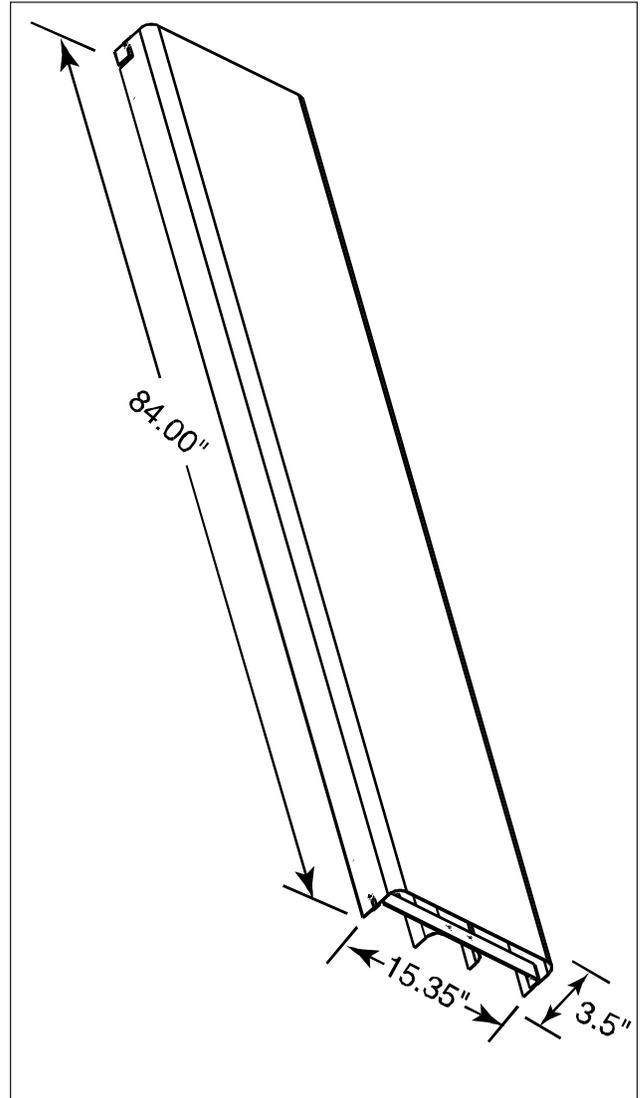


Figure 6

Special Note:
Fiber Optic
Training
Program



Corning Cable Systems offers comprehensive, integrated training programs. Courses are structured for: telephony, CATV, LAN, Intelligent Transportation Systems and Power Utilities.

For information on Engineering Services Training call: 800-743-2671.

Corning Cable Systems reserves the right to improve, enhance, and modify the features and specifications of its products without prior notification.

Eclipse is a trademark of Corning Cable Systems LLC. All trademarks are property of their respective holders. Corning Cable Systems is certified ISO 9001. ©1998, 1999, 2000 Corning Cable Systems LLC. All rights reserved.

Corning Cable Systems LLC
PO Box 489
Hickory, NC 28603-0489 USA
1-800-743-2675
FAX: 828-327-5973
International 828-327-5000
<http://www.corning.com/cablesystems>

PRINTING INSTRUCTIONS

of Pages 3 Size 8.5x11
on # of sheets 2 Size 8.5x11

Stock 60# White

Ink Black

Fold: None X
 Fold lengthwise down middle, then in thirds
 so that title block is visible
 Letter-fold
 Gate fold

Drill

GBC Punch

Stapled: Yes X
 No

(Always staple in upper LEFT corner unless stated otherwise)

Print in the quantity requested by Purchasing Dept.