Corning Optical Communications Fiber Optic Cable Assembly GOLD™

When
Performance
Counts

CORNING

Corning recommends cleaning both single and multi-fiber connectors with the Universal Connector Cleaning Cassette (p/n 2104359-01). Follow the instructions in Corning Optical Communications SRP-006-093 and check the results with an inspection microscope. Corning Optical Communications recommends using this procedure every time a connector is unmated.

For customer support and service, call

1-800-743-2671 in Canada/USA

Freephone: 00800 26764641 in Austria/Belgium France/Germany/Ireland/ Italy/Luxembourg Netherlands/Spain/Switzerland/United Kingdom


+49 30 5303 2224 in Czech/Estonia/Hungary/Poland Slovakia


+49 30 5303 2214 in Denmark/Iceland/Finland Norway/Sweden

+49 30 5303 2244 in Cyprus/Greece/Malta/Portugal Slovenia

Connector Cleaning and Care


Step 1:

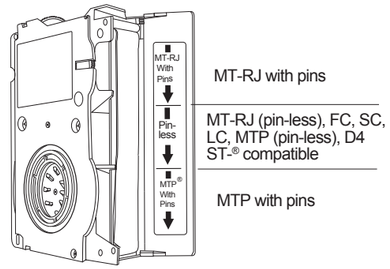

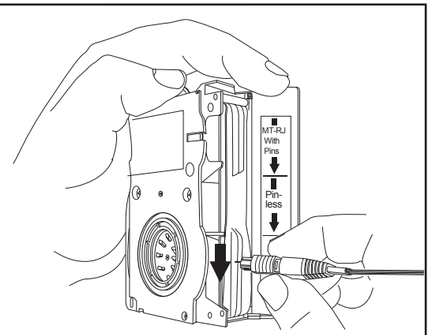


Remove the connector's dust cap and make two passes on the appropriate area of the cassette cleaning strip.

Step 2:

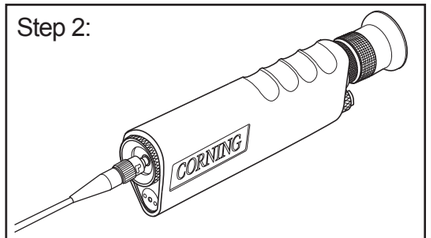

Check the connector end face with the microscope. Repeat Step 1 if necessary. If a connector still shows contaminants after repeating Step 1, refer to Section 5 of SRP-006-094.

Step 3:

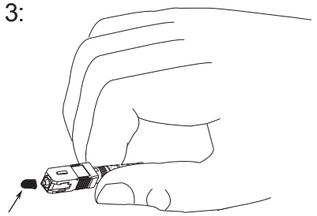

Always keep a clean dust cap on unused connectors. Do not allow the connector end face to come in contact with the inside of the dust cap.

Corning Optical Communications LLC
Box 489
Hickory, NC 28603-0489 USA

Corning Optical Communications Color Identification Guide

Fibers and buffer tubes are color-coded 1–24 as shown in the chart below:

Color Code

(SOLID) 1-12	(DASHED OR STRIPED) 13-24
1 Blue	**13** Blue / Dash or stripe
2 Orange	**14** Orange / Dash or stripe
3 Green	**15** Green / Dash or stripe
4 Brown	**16** Brown / Dash or stripe
5 Slate	**17** Slate / Dash or stripe
6 White	**18** White / Dash or stripe
7 Red	**19** Red / Dash or stripe
8 Black	**20** Black / Dash or stripe
9 Yellow	**21** Yellow / Dash or stripe
10 Violet	**22** Violet / Dash or stripe
11 Rose	**23** Rose / Dash or stripe
12 Aqua	**24** Aqua / Dash or stripe

Note: Fan-out and MIC® unitized cables have the subunits numbered for identification.

Corning Optical Communications reserves the right to improve, enhance, and modify the features and specifications of Corning Optical Communications products without prior notification.

All trademarks are the property of their repective holders.

Corning Optical Communications is ISO 9001 certified.
© 2007, 2010, 2014 Corning Optical Communications LLC. All rights reserved.

Printed in U.S.A.

Corning Optical Communications LLC.
PO Box 489
Hickory, NC 28603-0489
For US and Canada 1-800-743-2673
International 828-901-5000
FAX: 828-901-5973
http:www.corning.com/opcomm